



Material

Acetal polymer (POM) with stainless steel 304 countersunk screw.

Pin material


Polycarbonate

Colour

Black or white. Other RAL colours available (MOQs apply).

Function

The friction of this hinge can be adjusted by tightening or loosening the screw, giving you full flexibility and ease of use.

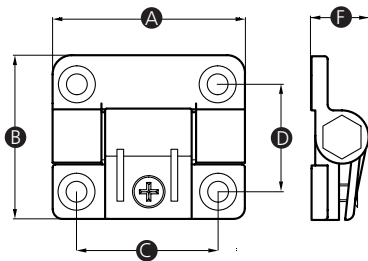

Part No.	A	B	C	D	E	F	Hole size (mm)	Colour
12824X	43	37	32	25	-	12	4.2	Black
10896Y	43	37	32	25	-	12	4.2	White
15058X	65	56	48	36	-	19	6.8	Black
15282S	65	56	48	36	-	19	6.8	White

Part No.	Hinge torque (Nm)	Radial load (N)	Axial load (N)	Recommended tightening torque (Nm)	Approx. shear force per screw (kN)
12824X	0.7	300	575	1.5	0.28
10896Y	0.7	300	575	1.5	0.28
15058X	0.7	350	690	2.5	0.5
15282S	0.7	350	690	2.5	0.5